



Brand of lasselsbergergroup

Declaration of Performance No: W 13 01

- Unique product identification code** : Wxxxxxx except mosaics (WDMxxxxx)¹
The type, series or another product identification code that enables its unique identification: glazed ceramic tile element with absorbing power above 10 % - Color One tiles in the manufacturer's catalogue.
¹) The initial characters (letters and numbers) given in this DoP, which precede the string of characters marked "x", are decisive for product identification, whereby any alphanumeric character may be used instead of the "x" character: A-Z or 0-9.
- Intended use:** Intended use: Dry-pressed ceramic tiles with water absorption Eb > 10%, group BIII (Annex K) for the internal and external building wall and floor tiling of buildings.
- Intended use:** This group of products involves glazed tile elements designed for final modification of inner walls of housing areas. The range of colours is diverse, with various types of décor in natural variation of tints, which are marked on the packaging. It is necessary to pay attention to information provided on the packaging, accompanying leaflets and the producer's technical catalogue before installation of the product (<https://www.rako.cz/cs/pro-odborniky>). It is necessary to observe the rules for application of construction chemicals that are stated in the concerned manuals.
- Manufacturer:** LASSELSBERGER, s.r.o., Adelova 2549/1, 320 00 Plzeň-Jižní Předměstí (Company ID No: 25238078) Czech Republic, Phone No.: +420 800 303 333, Fax: +420 378021 119, e-mail: info@rako.cz
- Authorised representative:** N/A
- Systems for assessing and verifying the performance stability of construction products:** System 4 (according to Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 and Annexes V, point 1.5 of 27 May 2014).
- In the case of the declaration of performance concerning construction products subject to the **harmonized standard** EN 14 411: 2012: **name and identification number of notified body:** irrelevant.
- The declared performances** listed in the statement apply to all commercial quality classes:


Table 1: Declared product performances

Basic characteristics	Value of properties	Harmonized technical specification
Reaction to fire	Class A1	without testing (decree 96/603 EHS)
Release of hazardous substances - cadmium - lead - other dangerous substances	NPD* NPD* NPD*	EN 14 411:2012
Adhesion: - cementitious adhesives, type C1 - dispersion adhesives - reaction resin adhesives - mortar	≥0.5 N/mm ² ≥1,0 N/mm ² ≥2,0 N/mm ² NPD*	
Durability for: - internal use	Pass	

* No Performance Determined - NPD (No Performance Determined)

- The relevant technical documentation and/or specific technical documentation:**
The performances of the above-stated product comply with the set of declared performances. This declaration of performance is in compliance with Regulation (EU) No. 305/2011 issued on the exclusive liability of the above-stated manufacturer.

Signed on behalf of the manufacturer and in its name:
November 1st, 2021 Pilsen
Replaces the declaration dated November 11th, 2020

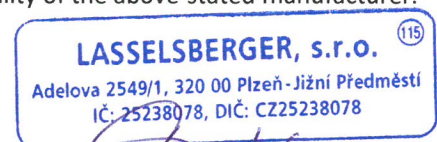

Ing. Zuzana Fajfrová, Quality Manager