


## PES

### Accessories

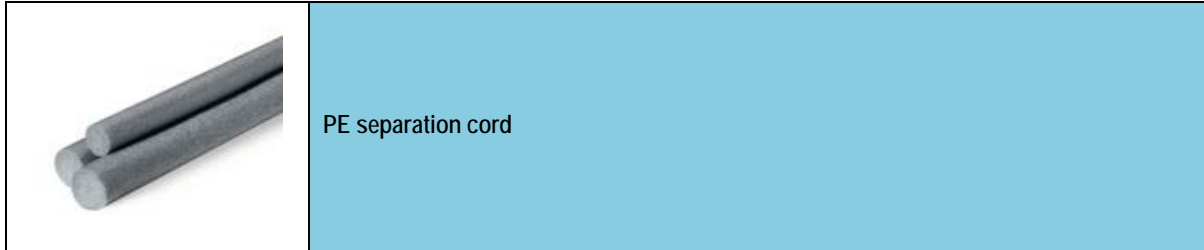

#### APPLICATION:

A flexible, solid-profile cord from foamed polyethylene, intended for the sealing of dynamically stressed joints and cracks.

A cord for the separation of flexible sealants from the base, especially in LBCS system solutions.

To define a suitable shape of cross-section of flexible sealants.

The cord is silicone-free, therefore, it can be used in facilities that require its application (such as paint shops, etc.).

This product is ideal for contact with silicone sealants if adhesion of sealant is not required.

Advantages – easily processable, fast and simple application.

Colour – grey-black

#### Characteristic features:

- flexible
- non-absorbing
- odourless
- chemically resistant
- hygienically safe, without effects on the environment

#### COMPOSITION:

Non-crosslinked foamed polyethylene with a closed cellular structure

Dimensions						
Diameter	4 mm	6 mm	8 mm	10 mm	12 mm	15 mm
Length	100 m	100 m	100 m	100 m	100 m	100 m

#### TECHNICAL PARAMETERS:

Coefficient of heat conductivity	0.038 W/m.K
Water absorption	max. 1.5%
Dimensional stability (longitudinal)	max. 2%
Heat resistance (for permanent load)	-65°C to +90°C

#### Joint preparation:

The joints should be completely free. Residues of grouting and adhesive materials should be removed.

**PROCESSING:**

The cord diameter is to be selected proportionally bigger than the width of the sealed joint. Unroll the cord, measure the necessary length, and cut the cord. Then, insert the cord directly into the prepared joint. Seat the cord in position to create a suitable space for application of a given type of flexible sealant. Then, sealing can be performed immediately.

**CAUTION:**

- Unused residues should be disposed as of other wastes (see the Safety Data Sheet).
- Only completely clean plastic materials may be handed over to recycling.

**SAFETY AND HYGIENE REGULATIONS:**

This product is not classified as a dangerous substance.

**STORAGE:**

If stored in a dry place, at least 24 months. The expiration date is specified on the packaging.

**SHIPPING:**

A bundle in a length of 100 m.

**QUALITY:**

- The product quality is regularly checked in the manufacturer's laboratories.
- The distributor applies a certified quality management system, according to ISO 9001.

**DISTRIBUTOR:**

LASSELSBERGER, s.r.o., Adelova 2549/1, 320 00 Pilsen – Jižní Předměstí

**VALIDITY:**

Since 1 August 2013

We reserve the right to make any changes that are the result of technical progress. This issue cancels and supersedes all previous issues.